
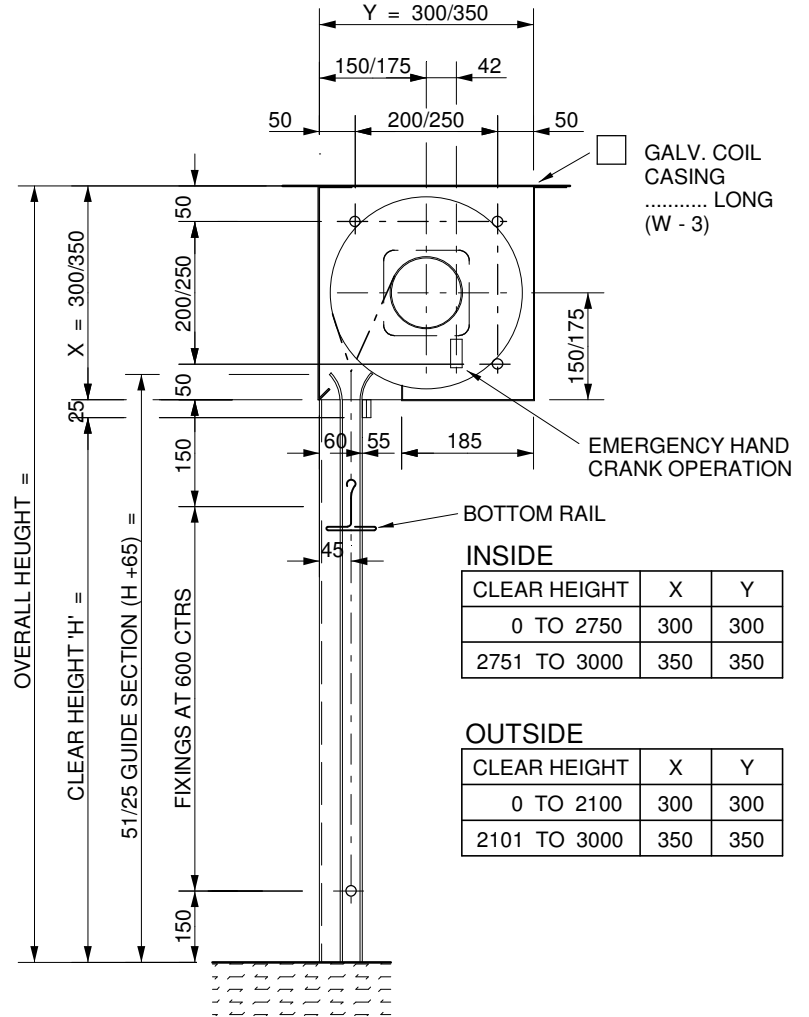


ALL FIXINGS TO BE DRILLED AND PLUGGED TO SUIT 12's WOODSCREWS.

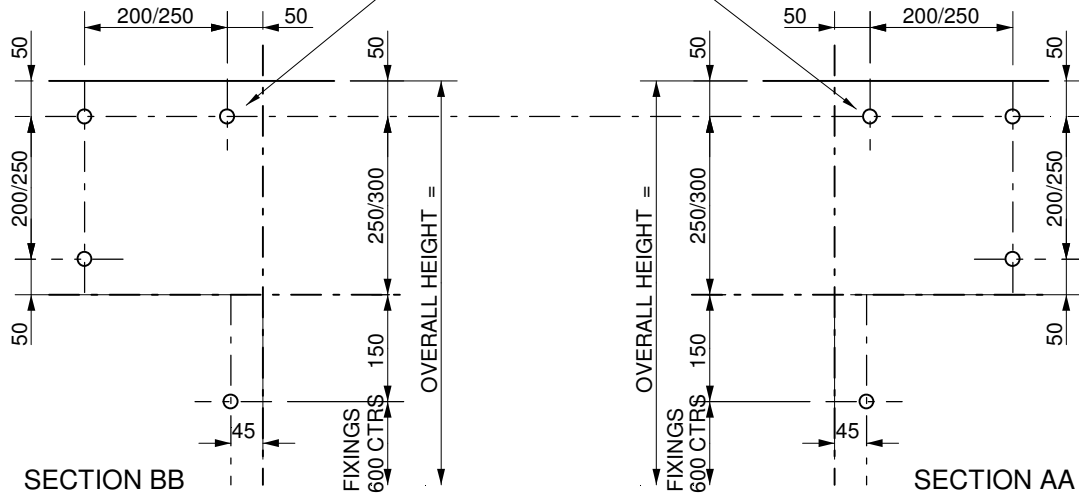


INSIDE

CLEAR HEIGHT	X	Y
0 TO 2750	300	300
2751 TO 3000	350	350

OUTSIDE

CLEAR HEIGHT	X	Y
0 TO 2100	300	300
2101 TO 3000	350	350

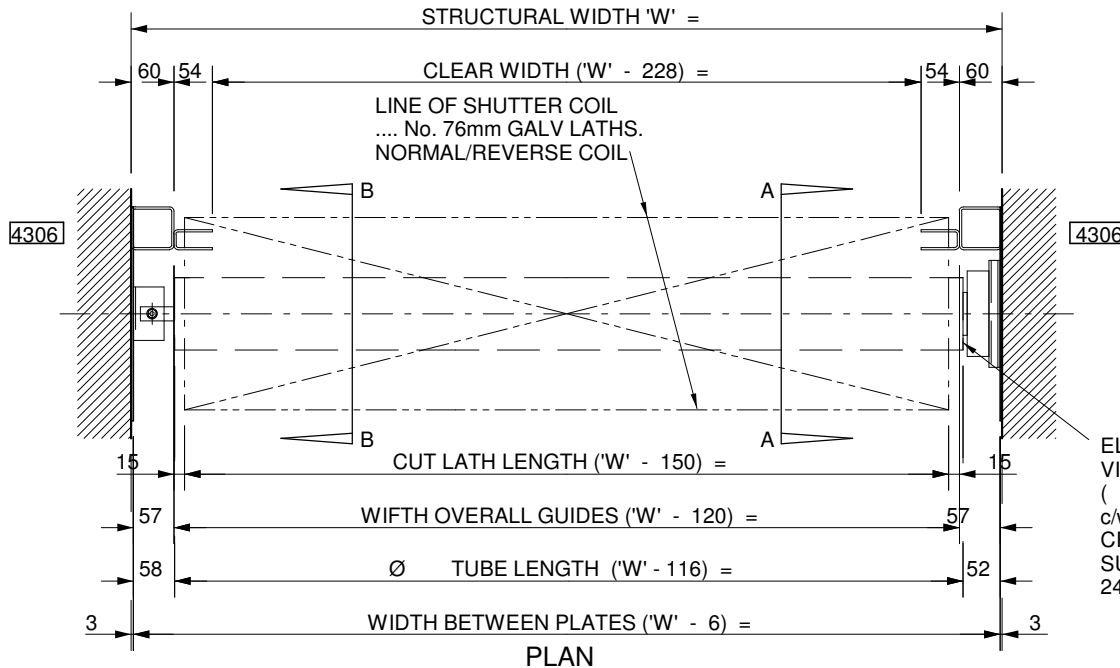

ELECTRIC OPERATION VIA TUBULAR MOTOR.
()
c/w EMERGENCY HAND CRANK OPERATION.
SUPPLY:
240v 1ph

TYPICAL SECTION

REVN:	DESCRIPTION:	DATE:
DATE:	CONTRACT No:	
SCALE:		
DRN BY:	DRAWING No:	
CHECKED BY:	4560	

Welding Engineers (Mersey) Ltd.,
UNIT 2,3 & 4 NAVIGATION TRADING ESTATE,
BOWER STREET, NEWTON HEATH,
MANCHESTER, M40 2AR.

TITLE:
ARRANGEMENT for No. ELECTRICALLY
OPERATED GALV. STEEL ROLLER SHUTTER.

CLIENT: