



'Mersey' Safefold Aluminium Folding Shutter

'Mersey' Safefold Folding Shutter has been specifically designed for use on light duty lift cars where space, weight and durability is at a premium.

In addition to complying with the above requirements the shutters have also been designed to comply with the latest EEC safety legislation.

LEAVES

90mm wide x 1.6mm thick aluminium mill finish leaves with vertical edges rolled to form round hinging section with 6mm dia mild steel hinge pin. Leaves are prevented from over travel by scissor lattice attached to each hinge pin.

SHUTTER FRONT

Fabricated from leaf section to form a 50mm x 20mm strong rectangular hollow section to give added strength.

REAR SEALING

Aluminium mill finish section for securing last leaf to structure.

TOP TRACK:


Shutter top hung via double sealed rollers attached to top of each hinge pin from rolled steel track 27mm deep.

BOTTOM TRACK

Aluminium extruded mill finish section with a 19mm wide x 24mm deep groove to guide round nylon blocks attached to bottom of each hinge pin.

A photograph of a Mersey Safefold Aluminium Folding Shutter, showing its vertical slats and the top track mechanism. The image is overlaid with a blue gradient and the product name in large, bold, white-outlined letters.

MERSEY SAFEFOLD ALUMINIUM FOLDING SHUTTER

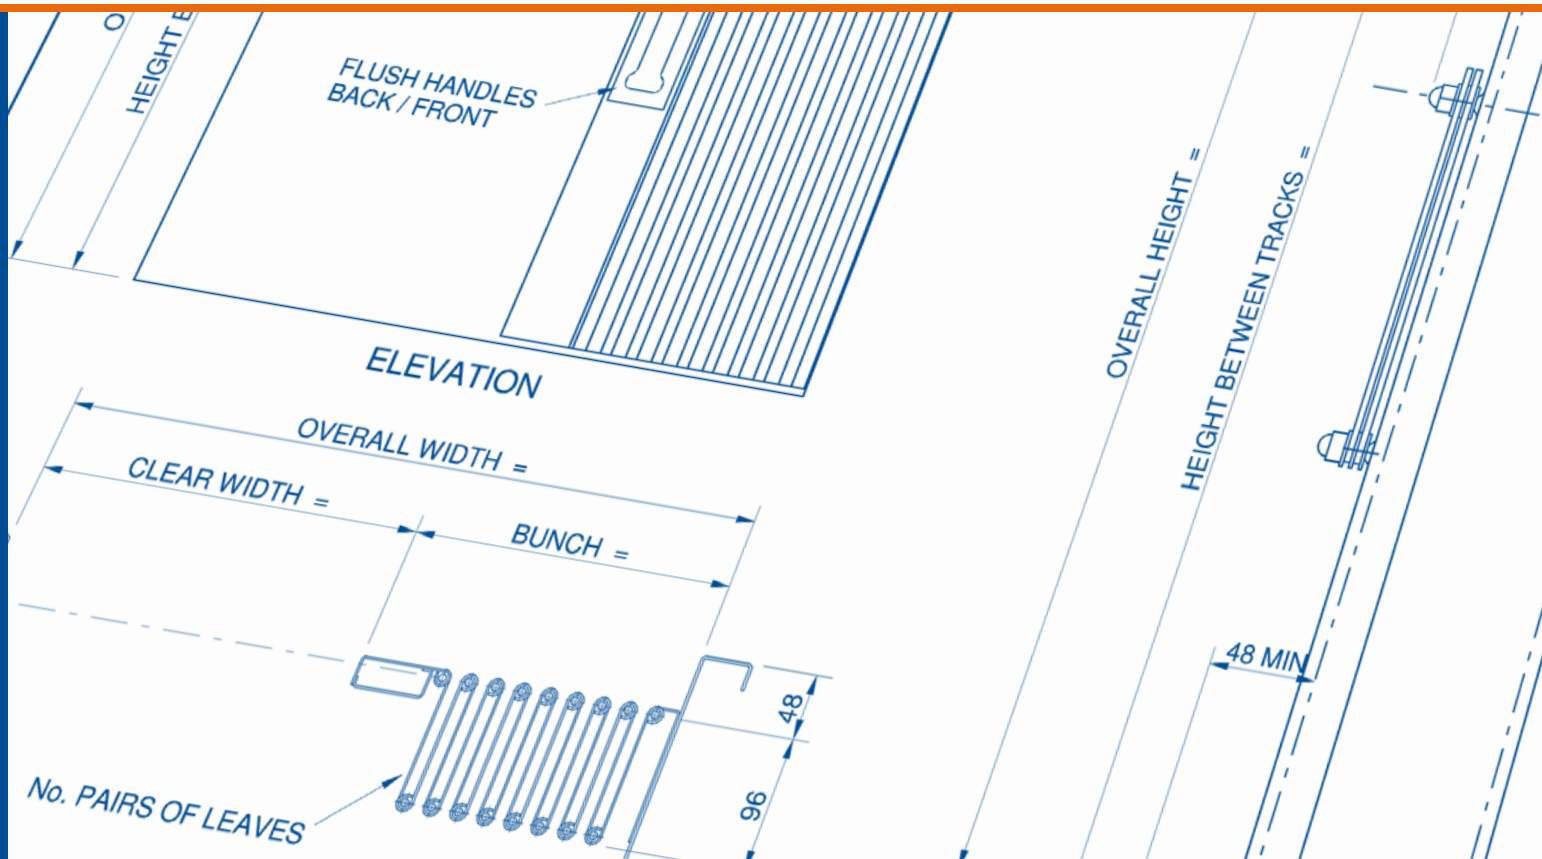

WEIGHT:

Approximately 20kg/sq.m

SPACE REQUIREMENTS AND DIMENSIONS

Refer to standard drawings

Options include:

- Vision panel
- Magnetic catch recessed into the leading edge
- Standard Mill finish
- Powder coating to any BS/RAL colour available at additional cost



www.liftgates.co.uk
enquiries@liftgates.co.uk