



'Mersey' Multi Leaf Lift Gates

'Mersey' Multi Leaf Lift Gates are renowned for their strength, durability and are attractive in appearance. Their comparative small bunch depth makes them ideal for lift cars where maximum depth of car is required e.g. cargo and hospital lifts.

GATE FRAME

Heavy duty galvanised mild steel double channel vertical pickets fitted with precision hardened ball bearing concave or convex pulleys at the top and malleable cast iron blocks at the bottom. Hot rolled mild steel lattice bars pass between and interconnect the vertical pickets.

PANELS

230mm wide

TOP TRACK


Gates up to 2300mm height between tracks and up to 3050mm overall width are top hung from blade top track which has a round top for ease of operation as standard, but can be supplied with 2-piece rolled or heavy duty fabricated top tracks if site conditions dictate.

Gates over 3050mm overall width are top hung from 2-piece rolled or heavy duty fabricated top tracks.

BOTTOM TRACK

Galvanised mild steel 25mm x 25mm standard channel sections or heavy duty fabricated tracks (additional cost) to accommodate heavy traffic using the lift.

MERSEY MULTI LEAF LIFT GATES

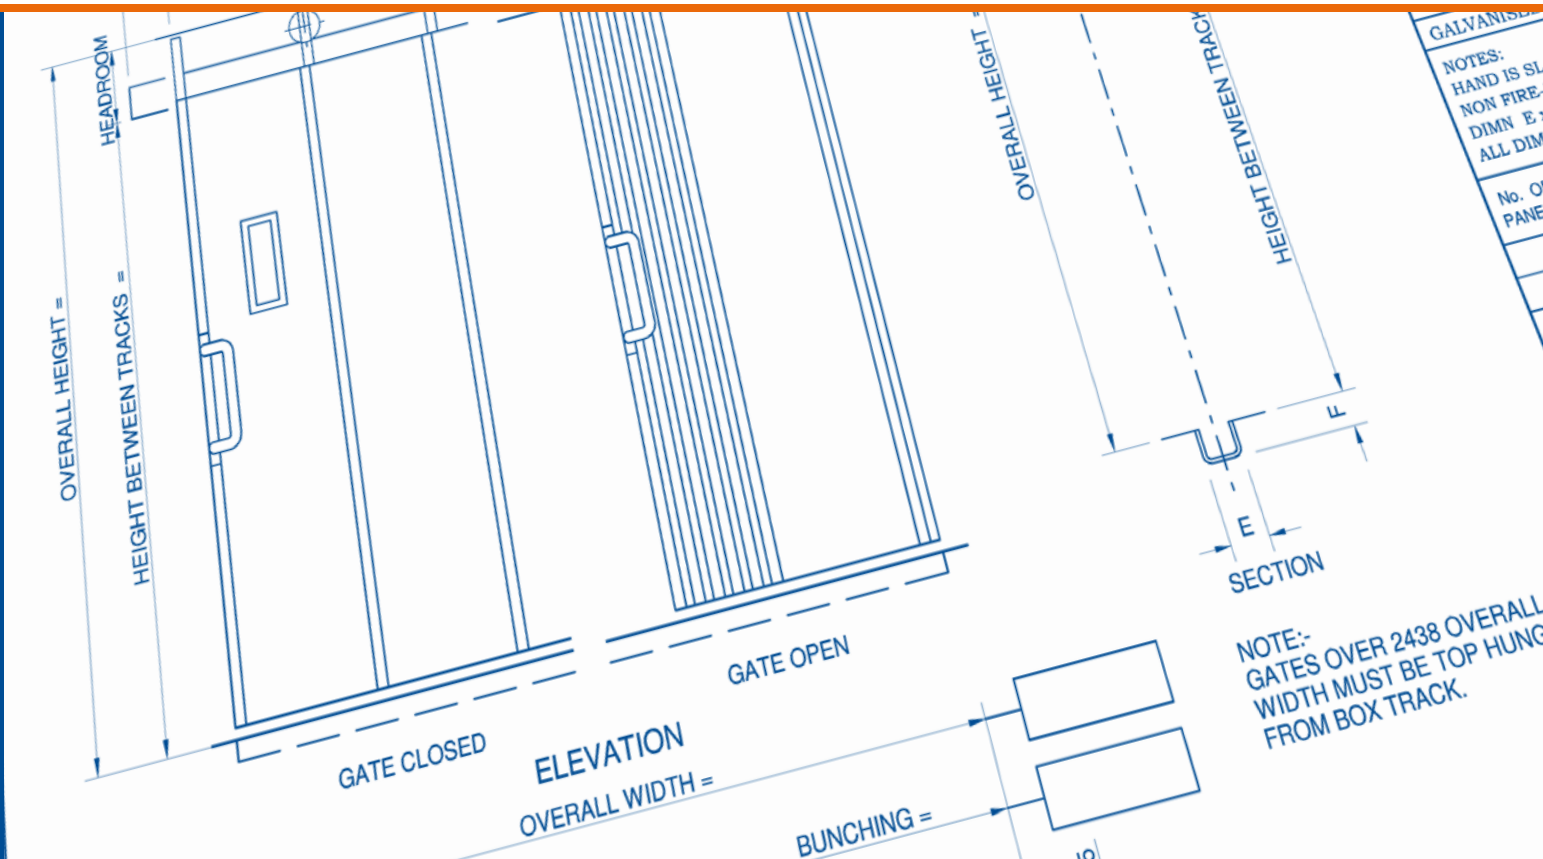

WEIGHT:


Approximately 61kg/sq.m

SPACE REQUIREMENTS AND DIMENSIONS

Refer to standard drawings

Options include:

- Vision panel
- Mathews catch
- Galvanised standard finish
- Stainless Steel (face side only) available at additional cost
- Powder coating to any BS/RAL colour available at additional cost

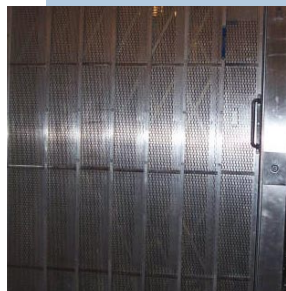

www.liftgates.co.uk
enquiries@liftgates.co.uk